

MYK/3A/5LG/WA EO 48MP/LF EO 48MP 24X/640 IR/NIR

850nm/LRF/TA Tr

Three-axis Five-light Gimbal Camera

1. Product Introduction

MYK/3A/5LG/WA EO 48MP/LF EO 48MP 24X/640 IR/NIR 850NM/LRF/TA TR gimbal camera consists of a high-resolution uncooled thermal infrared camera, 48M-pixel wide-angle EO camera, 48M-pixel zoom EO camera (38X optical zoom, 300X hybrid zoom), 3km LRF, near-Infrared fill light, a three-axis servo-stabilized platform and a video processing unit (AI recognition and auto tracking). It features light weight, high stability accuracy, high integration, AI recognition and auto tracking. It can be integrated to the small and micro-sized UAV to complete tasks such as day and night reconnaissance and surveillance of target areas.

The gimbal camera has been adapted to a number of mainstream domestic flight control platforms, docked seamlessly with the flight control; and it can be accessed to the unit's MYLK Vision Studio display and control software platform, which can assist the overall unit complete the development of the unmanned aircraft system.

The gimbal Camera can detect, identify, and track the ground targets for 24 hours both in daytime and nighttime. It also supports for infrared and visible light videos streaming in real time.

Application: Reconnaissance, Border patrol, Search and rescue, Forest fire prevention.

2. Product Photo



Fig 1 MYK/3A/5LG/WA EO 48MP/LF EO 48MP 24X/640 IR/NIR
850NM/LRF/TA TR photo

3. Function

- a) AI recognition and auto tracking;
- b) Self-check and fault report;
- c) Output infrared camera and EO camera video;
- d) One key return zero, Look down mode;
- e) Target location;
- f) Photo taking and video recording;
- g) Quick-release;
- h) 48MP EO camera, 38X optical zoom, 300X hybrid zoom;
- i) EO camera have Optical zoom, auto-focus, manual focus, defog, Image enhance and low illumination;
- j) TI camera have 1~8X digital zoom, 6 kinds of color palette;
- k) It is equipped with near-infrared fill light function, enabling clear visible imaging within 100 meters at night;
- l) Large target 3km Laser range finder;
- m) Freely rotate in yaw, pitch and roll axis;
- n) Head lock / Manual search / Follow-up / attitude stabilization / tracking mode;
- o) Mechanical image stabilization;
- p) Supports manual target lock/unlock and automatic target lock.
- q) Auto track the target with powerful jamming-resistant;

- r) Memory tracking / Recapture / Adjust size of the tracking gate /Switch tracking point;
- s) Bidirectional communication with the ground station via UART/IP (UDP);
- t) IP video interface (RTSP / UDP/TS protocol).

4. Application platforms

Fixed wing UAV, Multi-rotor UAV, Tethered UAV, etc.

5. Specification

Model	MYK/3A/5LG/WA EO 48MP/LF EO 48MP 24X/640 IR/NIR 850NM/LRF/TA TR
System Para	
Net Weight	1300g
Size	152mm×169mm×198mm
Input voltage	3s~8s (12V~32VDC)
Consumption	Stable consumption17W(Power-on peak current ≤ 5A)
Video interface	IP(RTSP / UDP/TS, H.265/H.264, 4K@30Hz)
Control Method	UART/IP
Local-storage	TF card(Up to 512G)
Picture storage format	JPG(8000×6000)
Video storage format	MP4(4K@30Hz)
Network read card	HTTP read TF card online
Geotagging	Support, display time and GPS coordinate in picture exif
Function	AI recognition, Auto-tracking, Target location, One key return zero, Look down
Target location accuracy	≤30m(cep)@1km
Mounting method	TJport-V2 quick-release
Support AutoPilot Protocol	MAVLink, Chuangheng, Weike, Jizhi, Borui, etc.
Wide angle EO camera spec	
Sensor Type	1/2" CMOS
Resolution	48MP(8000×6000)
Focal length	4.49mm
Digital zoom	1~1.5X
FOV	83.5° ×67.4° (±5%)
Focus	athermalized fixed focus

Long-focus EO camera spec	
Sensor Type	1/2" CMOS
Resolution	48MP(8000×6000)
Optical zoom	24X
Focal length	15mm~50mm
Hybrid zoom	300X
FOV	48.5° × 28.5° ~ 2.1° × 1.2° (±5%)
Focus	Manual zoom / Auto focus / Manual focus
DRI(visibility≥15km)	Human target(1.7m×0.5m): D≥6km; R(manual)≥3km; l≥1.5km Vehicle target(6m×3m): D≥27km; R(manual)≥13km; l≥6.8km
TI camera spec	
Detector Type	Uncooled Focal Plane Detector
Working Waveband	8μm~14μm
Resolution	640×512
Pixel	12μm
Focal Length	35mm
Focus	athermalized fixed focus
FOV	12.5° × 10° (±5%)
Palette	6 kind(WH / BH / Iron red etc.)
Digital zoom	1~8X
NETD	≤50mK
MRTD	≤500mk
DRI(ΔT≥5K)	Human target(1.7m×0.5m): D≥1.3km; R(manual)≥450m; l≥230m Vehicle target(6m×3m): D≥6.2km; R(manual)≥2km; l≥1km
Laser range finder(Eye safe)	
Wavelength	1535nm
Maximum Distance	Vehicle≥3km (under the condition of visibility ≥15Km, 2.3m 2.3m × 2.3m Car); Vehicle≥5km (under the condition of visibility ≥15Km, Building);
Minimum Distance	≤20m
Accuracy	≤±2m

Laser divergence	≤0.7mrad
Frequency	1Hz~10Hz
Near-Infrared Fill Light spec	
Wavelength	850nm
FOV	8°
Fill Light Distance	≥100m
Gimbal spec	
Yaw	360°×n(360° continuous)
Pitch	-130°~+90° (upward is positive)
Roll	-60°+60°
Frame Angle Accuracy	≤0.1mrad (1σ)
Angular jitter	≤0.003° (1σ)
Maximum Rotating Speed	yaw≥60°/s, pitch≥60°/s
Video Processing Module	
AI recognition	The num of AI recognition human and vehicle targets ≥32
Recognition probability	85%
Track Size	≥16×16
Target contrast	≥5%
Track speed	48 pixel/frame
Tracking frame rates	50HZ
Environment	
Working temperature	-20°C~+55°C
Storage temperature	-40°C~+60°C
Vibration	The acceleration is 2g; the three directions of vertical, horizontal and longitudinal are 30 minutes each.
Shocking	Max acceleration20g, lasting time 11ms
IP	IP54

6. Dimensions

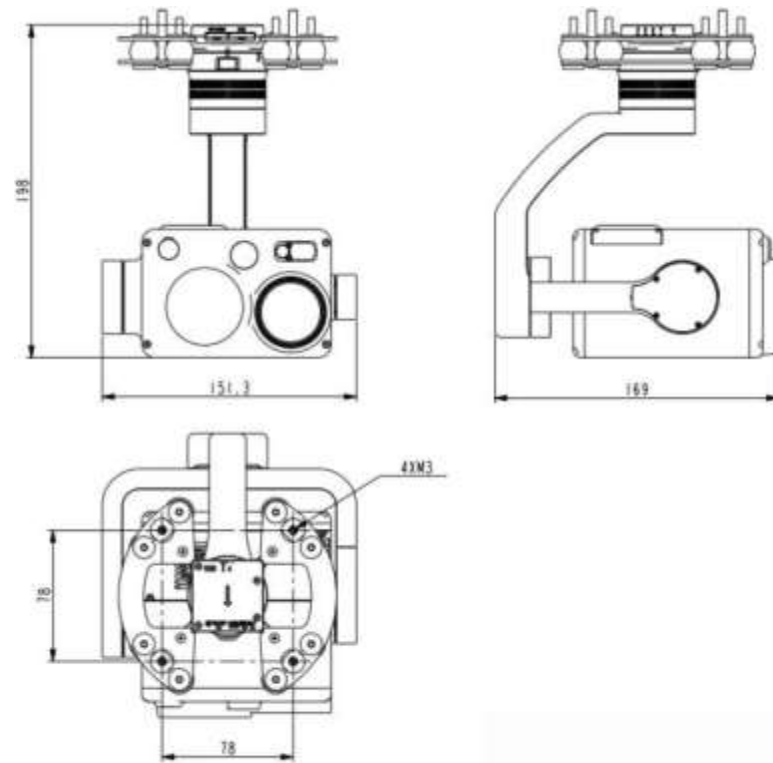


Fig2 Mechanical Dimensions